

COMPOSITIONS COMPRISING ENCAPSULATED MATERIAL**Publication number:** WO2004016234**Publication date:** 2004-02-26**Inventor:** NESS JEREMY NICHOLAS (GB); MCNAMEE JOHN (AU)**Applicant:** QUEST INT (NL); NESS JEREMY NICHOLAS (GB); MCNAMEE JOHN (AU)**Classification:**

- International: A61K8/11; A61Q13/00; B01J13/08; B01J13/10; B01J13/16; B01J13/22; A61K8/11; A61Q13/00; B01J13/06; B01J13/20; (IPC1-7): A61K7/00; A61K9/50; B01J13/06; B01J13/22

- european: A61K8/11C; A61Q13/00; B01J13/08; B01J13/10; B01J13/16; B01J13/22

Application number: WO2003GB03518 20030812**Priority number(s):** EP20020255677 20020814; EP20020257436 20021025**Also published as:**

US200603993
MXPA0500168
AU200325137

Cited documents:

WO9220771
EP1247568
US4999189
EP0453001
EP0391556
more >>

Report a data error**Abstract of WO2004016234**

A composition such as a water-based consumer product comprises material (e.g. perfume) encapsulated within shell capsules, each capsule comprising an encapsulating wall having an inner surface and an outer surface, with a coating on the inner surface and/or outer surface of the shell wall, the composition further comprising surfactant and/or solvent. The coating can improve the barrier properties of the shell and can enhance retention of the encapsulated materials within the shell.

Data supplied from the esp@cenet database - Worldwide

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
26 February 2004 (26.02.2004)

PCT

(10) International Publication Number
WO 2004/016234 A1

- (51) International Patent Classification⁷: **A61K 7/00**, (74) Agent: **KEITH W NASH & CO**; 90-92 Regent Street, Cambridge CB2 1DP (GB).
B01J 13/22, 13/06, A61K 9/50
- (21) International Application Number: PCT/GB2003/003518
- (22) International Filing Date: 12 August 2003 (12.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
02255677.3 14 August 2002 (14.08.2002) EP
02257436.2 25 October 2002 (25.10.2002) EP
- (71) Applicant (for all designated States except US): **QUEST INTERNATIONAL B.V.** [NL/NL]; Huizerstraatweg 28, NL-1411 GP Naarden (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **NESS, Jeremy, Nicholas** [GB/GB]; 4 Clevedon Court, Green Lane, Challock, Ashford, Kent, TN25 4BW (GB). **MCNAMEE, John** [AU/AU]; Wongajong, Wongajong Close, Castle Hill, NSW 2154 (AU).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:**
— of inventorship (Rule 4.17(iv)) for US only
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 2004/016234 A1

(54) Title: COMPOSITIONS COMPRISING ENCAPSULATED MATERIAL

(57) Abstract: A composition such as a water-based consumer product comprises material (e.g. perfume) encapsulated within shell capsules, each capsule comprising an encapsulating wall having an inner surface and an outer surface, with a coating on the inner surface and/or outer surface of the shell wall, the composition further comprising surfactant and/or solvent. The coating can improve the barrier properties of the shell and can enhance retention of the encapsulated materials within the shell.

COMPOSITIONS COMPRISING ENCAPSULATED MATERIAL

Field of the Invention

This invention concerns compositions, particularly consumer products, containing encapsulated material, and relates to such compositions and encapsulates.

Background to the Invention

It is known to encapsulate perfume or other materials, in small capsules (or micro-capsules), typically having a diameter less than 1000 microns, for a variety of reasons relating to the protection, delivery and release of the perfume or other material. One type of capsule, referred to as a wall or shell capsule, comprises a generally spherical hollow shell of e.g. perfume-insoluble material, typically polymer material, within which perfume or other material is contained.

If such capsules are incorporated in certain solvent and/or surfactant-containing consumer products, e.g. shampoos, stability problems can arise, with the encapsulated material tending to leach out of the capsules into the product over time, at least in cases where the capsule contents are soluble in ingredients of the product.

The present invention aims to address such stability problems.

Summary of the Invention

In one aspect the present invention provides a composition comprising material encapsulated within shell capsules, each capsule comprising an encapsulating wall having an inner surface and an outer surface, with a coating on the inner surface and/or outer surface of the shell wall; and surfactant and/or solvent.

The composition may be a fragranced composition. The term "fragranced composition" is used to mean a composition containing at least 0.1% by weight of one or more perfume materials (as discussed below). The perfume material may be present in the composition, encapsulated within shell capsules and/or in unencapsulated form.

Preferably, the composition is a product, particularly a consumer product, conveniently in liquid or solid form. Preferably, the product is a liquid product and more preferably a water-based product.

Examples of products include fabric care products such as fabric detergents e.g. laundry liquids and laundry powders, fabric conditioners e.g. rinse conditioners and sheet conditioners, fabric treatment products including fabric refresher products, e.g. sprays, starch sprays, ironing sprays and stain remover sprays; personal care products such as skin care, hair care and personal cleansing products including hair shampoos, body washes and shower gels, bath foams, toilet soap, toothpaste, mouthwash, deodorants and antiperspirants, skin creams and lotions and the like, colognes, body sprays, personal perfumes; and household products such as toilet cleaners, hard surface cleaners, abrasive cleaners, general purpose cleaners and bleaches.

Typically the product will be of generally conventional composition, as is known to those skilled in the art, and may comprise further excipients appropriate to the nature of the product. Suitable excipients may include fixatives, softening agents, enzymes, builders, bleaching agents, bleach activators, suspending agents, thickeners, silicones, emollients, humectants, vitamins, flavours, perfumes, antibacterial agents, etc. Details of suitable excipients for products such as fabric detergents, fabric conditioners, personal cleansing products, particularly hair shampoos and shower gels, and household cleaners are described in WO 98/28396 and WO 98/28398. Details of suitable excipients for 'leave-on' products such as deodorants and antiperspirants, skin creams, colognes etc, are described, for example, in L. Appell, "The Formulation and Preparation of Cosmetics Fragrances and Flavours", Micelle Press (1994), Chapter 1.

The encapsulated material generally comprises a first material which is conveniently at least partially, preferably substantially and more preferably completely soluble, in the surfactant and/or solvent of the compositions defined herein. Preferably, the first material is substantially water-insoluble to facilitate preparation of an emulsion or dispersion of the material prior to encapsulation.

Suitable types of such first materials which may be encapsulated within shell capsules as defined herein include perfumes, cosmetic ingredients such as moisturisers, conditioning agents, sunscreens, physiological coolants and emollient oils, agrichemicals such as insecticides and herbicides, dental flavours, insect repellents, antimicrobial agents, deodorant actives, or mixtures thereof.

As is well known, a perfume normally consists of a mixture of a number of perfume materials, each of which has an odour or fragrance. The number of perfume materials in a perfume is typically 10 or more. The range of fragrant materials used in perfumery is very wide; the materials come from a variety of chemical classes, but in general are water-insoluble oils. In many instances, the molecular weight of a perfume material is in excess of 150, but does not exceed 300.

Perfumes used in the present invention can be mixtures of conventional perfume materials. Such materials are, for example, natural products such as extracts, essential oils, absolutes, resinoids, resins, concretes etc., but also synthetic materials such as hydrocarbons, alcohols, aldehydes, ketones, ethers, acids, esters, acetals, ketals, nitriles, etc., including saturated and unsaturated compounds, aliphatic, carbocyclic, and heterocyclic compounds.

Such perfume materials are mentioned, for example, in S. Arctander, *Perfume and Flavor Chemicals* (Montclair, N.J., 1969), in S. Arctander, *Perfume and Flavor Materials of Natural Origin* (Elizabeth, N.J., 1960) and in "Flavor and Fragrance Materials - 1991", Allured Publishing Co. Wheaton, Ill. USA.

Examples of perfume materials which can be used in the invention are: geraniol, geranyl acetate, linalol, linalyl acetate, tetrahydrolinalol, citronellol, citronellyl acetate, dihydromyrcenol, dihydromyrcenyl acetate, tetrahydromyrcenol, terpineol, terpinyl acetate, nonpol, nopyl acetate, 2-phenyl-ethanol, 2-phenylethyl acetate, benzyl alcohol, benzyl acetate, benzyl salicylate, styrallyl acetate, benzyl benzoate, amyl salicylate, dimethylbenzyl-carbinol, trichloromethylphenyl-carbinyl acetate, p-tert-butylcyclohexyl acetate, isononyl acetate, vetiveryl acetate, vetiverol, α -hexylcinnamaldehyde, 2-methyl-3-(p-tert-butylphenyl)propanal, 2-methyl-3-(p-isopropylphenyl)propanal, 2-(p-tert-butylphenyl)-propanal, 2,4-dimethyl-cyclohex-3-enyl-carboxaldehyde, tricyclodecenyl acetate, tricyclodecenyl propionate, 4-(4-hydroxy-4-methylpentyl)-3-cyclohexenecarboxyaldehyde, 4-(4-methyl-3-pentenyl)-3-cyclohexenecarboxaldehyde, 4-acetoxy-3-pentyl-tetrahydropyran, 3-carboxymethyl-2-pentylcyclopentane, 2-n-heptylcyclopentanone, 3-methyl-2-pentyl-2-cyclopentenone, n-decanal, n-dodecanal, 9-decenol-1, phenoxyethyl isobutyrate, phenyl-acetaldehyde dimethyl-acetal, phenylacetaldehyde diethylacetal, geranyl nitrile, citronellyl nitrile, cedryl acetate, 3-isocamphylcyclohexanol, cedryl methyl ether, isolongifolanone, aubepine nitrile, aubepine, heliotropin, coumarin, eugenol, vanillin, diphenyl oxide, hydroxycitronellal, ionones, methylionones, isomethylionones, irones, cis-3-hexenol and esters thereof, indan musks, tetralin musks, isochroman musks, macrocyclic ketones, macrolactone musks, ethylene brassylate.

The perfume should be substantially free of water-miscible materials such as dipropylene glycol. Solvents which can be used for perfumes include, for example: diethyl phthalate, triethyl citrate, etc.

Examples of suitable moisturisers, emollient oils and conditioning agents useful herein include cyclic silicones, esters such as isopropyl myristate, olive oil, mineral oil and tercopheryl acetate. See also WO 96/12468 page 56.

Examples of sunscreening agents useful herein include octyl methoxy cinnamate available for example as Parsol MCX (Parsol MCX is a Trade Mark) from Hoffman LaRoche,

nonylmethoxycinnamate, 2-ethyl hexyl salicylate, benzophenone, and para amino benzoic acid and its esters. See also WO 96/12468 page 55 to 56.

Examples of suitable insecticides useful herein include pyrethroid compounds such as pyrethrum and 3-phenoxybenzyl 2,2-dimethyl-3-12',2'-dichlorovinyl)-cyclopropane-carboxylate (permethrin).

A wide range of well known dental flavours may be used which may be natural or synthetic, e.g. oil of spearmint, peppermint, wintergreen, sassafras, clove, sage, eucalyptus, marjoram, cinnamon, lemon and orange, menthol, eugenol, aniseed, cinnamic aldehyde, menthyl acetate and methyl salicylate.

As examples of suitable insect repellents may be mentioned N,N-diethyl-m-toluamide (DEET), benzamide, methyl neodecanamide, hexane-1,2-diol, methyl and 3-(N-butylacetyl-amino)-propionic acid ethyl ester, commercially available as Merck IR 3535 from Merck & Co. Inc.

Preferably, the antimicrobial agent is water-insoluble. An example of a suitable water-insoluble antimicrobial agent for use herein is 5-chloro-2-[(2,4-dichlorophenyl)oxy]phenol, more commonly known as Triclosan (Triclosan is a Trade Mark), commercially available for example as Irgasan DP300 (Irgasan DP300 is a Trade Mark) from Ciba Speciality Chemicals.

Suitable deodorant actives include, for example, materials such quaternary ammonium compounds e.g. cetyl-trimethylammonium bromide, lauroyl sarcosine, N-myristoyl glycine, diaminoalkyl amides such as L-lysine hexadecyl amide, zinc citrate and zinc pyrithione.

Examples of suitable physiological coolants useful herein include menthol, menthol PCA, menthyl lactate, menthyl succinate and menthyl carbonate.

The encapsulated material may comprise one or more first materials.

In addition to the above-described first material of the shell capsules, or in the alternative, there may also be present one or more second materials which may be insoluble in the surfactant and/or solvent of the compositions defined herein. Examples of such insoluble materials include certain conditioning agents (e.g. high molecular weight dimethicones), pigments (e.g. titanium dioxide) and anti-dandruff agents (e.g. zinc pyrethione).

Optional further materials which may be encapsulated in the shell capsules herein include dyes and preservatives etc.

In a preferred embodiment, the encapsulated material is a perfume composition, which typically comprises at least 80% and preferably at least 90% by weight of the total weight of the perfume composition of perfume materials having an octanol-water partition coefficient of greater than 2.5 (in logarithmic form to base 10), and typically less than 35% and preferably less than 20% by weight of the total weight of the perfume composition of perfume materials having a octanol-water partition coefficient of greater than 5 (in logarithmic form to base 10).

The octanol-water partition coefficient (P) of a material i.e. the ratio of a material's equilibrium concentration in octanol and water, is well known in the literature as a measure of hydrophobicity and water solubility (see Hansch and Leo, Chemical Reviews, 526 to 616, (1971), 71; Hansch, Quinlan and Lawrence, J. Organic Chemistry, 347 to 350 (1968), 33). High partition coefficient values are more conveniently given in the form of their logarithm to the base 10, log P. While log P values can be measured experimentally i.e. directly, and measured log P data is available for many perfumes, log P values are most conveniently calculated or approximately estimated using mathematical algorithms. There are several recognised calculation or estimation methods available commercially and/or described in the literature (see for example A Leo, Chem.Rev 93(4), 1281-1306, (1993), "Calculating log P oct from structures"). Generally these models correlate highly but may for specific materials produce log P values which differ in absolute terms (by up

to 0.5 log units or even more). However, no one model is universally accepted as the most accurate across all compounds. This is particularly true for estimates on materials of high log P (say 4 or greater). In the present specification, log P values are obtained using the estimation software commercially available as 'LogP' from Toronto-based Advanced Chemistry Development Inc (ACD) which is well-known to the scientific community, and accepted as providing high-quality predictions of log P values. References to log P values thus mean values obtained using the ACD software.

The percentage by weight of perfume materials referred to herein is relative to the total weight of perfume materials present in the composition and excludes, for example, the presence of any optional solvents or diluents etc, such as e.g. diethyl phthalate, dipropylene glycol, benzyl benzoate, acetyl tributyl citrate, triethyl citrate, Hercolyn D and isopropyl myristate.

Preferred perfume materials for a perfume composition useful herein, are therefore those perfume materials having an octanol-water partition coefficient (log P) falling within the range 3 to 5. Examples of such perfume materials include the following:

1-(o-tert-butylcyclohexyloxy)butan-2-ol, 1,4-dimethylcyclohexane carboxylic acid methyl ester, 10-iso-propyl-2,7-dimethyl-1-oxaspiro[4.5]3,6-déca diene, 1-methyl-3-(2-methylpropyl)cyclohexanol, 3-(4-tert-butylphenyl)-2-methylpropanal, 4-methyl-3-decen-5-ol, 7,9-dimethylspiro[5,5] undecan-3-one, acetaldehyde ethyl cis-3-hexenyl acetal, acetyl diisoamylene (Q), alcohol C9 (nonanol), aldehyde C9 (nonanal), aldehyde C10 (decanal), aldehyde C11 (undecylenic aldehyde), alicate (Q), allyl caproate, allyl cyclohexyl propionate, allyl heptylate, allyl hexanoate, amyl benzoate, amyl cinnamic alcohol, amyl cinnamic aldehyde, amyl salicylate, amyl valerate, anethole, anther (Q), aurantion (Q), bangalol (Q), beauvertate (Q), benzophenone, benzyl cinnamate, benzyl phenylacetate, benzyl salicylate, borneol, bourgeonal (Q), butyl phenylacetate, calyxol (Q), carvacrol, carvacryl ethyl ether, carveol, cervolide (Q), cineole, Cis-hex-3-enyl salicylate, cistulate (Q), citral, citral dimethyl acetal, citrathal (Q), citronellal, citronellol, citronellyl acetate, citronellyl nitrile, citronellyl oxyacetaldehyde, citronellyl propionate, cressanther (Q),

cumin nitrile, cyclamen aldehyde (Q), cyclohexyl salicylate, damascone alpha, dec-4-enal, dec-9-enal, dec-9-enol, dihydroanethole, dihydrocarveol, dihydrocarvone, dihydrojasnone, dihydrolinalol, dihydromyrcenol, dihydromyrcenyl acetate, dihydroterpineol, dihydroterpinyl acetate, dimethylheptanol, diphenyl oxide, diphenylmethane, dodecyl nitrile, dupical (Q), elintaal (Q), empetaal (Q), ethyl cinnamate, ethyl heptylate, ethyl linalol, ethyl nonanoate, ethyl octanoate, ethyl safranate (Q), fenchyl acetate, fenchyl alcohol, florocyclene (Q), frutonile (Q), gardocyclene (Q), geraniol, geranyl acetate, geranyl nitrile, geranyl propionate, gyrene (Q), herbanate (Q), hexyl benzoate, hexyl cinnamic aldehyde, hexyl salicylate, inonyl acetate, inonyl propionate, ionones, iso E super (IFF), isoamyl salicylate, isobergamate (Q), isoborneol, isobornyl acetate, isobutyl benzoate, isobutyl cinnamate, isoeugenol, isojasnone, jasmatone (Q), jasmopyran (Q), jessate (Q), kerfoline (Q), lime oxide, linalool, linalyl acetate, linalyl propionate, maceal (Q), mefrosol (Q), menthanyl acetate, menthol, menthyl acetate, methyl chavicol, methyl eugenol, methyl ionones, methyl isoeugenol, methyl nonyl acetaldehyde, methyl octine carbonate, musk R1 (Q), myrcene, neobergamate (Q), nerol, nerolin, neryl acetate, nopyl acetate, octyl acetate, orange terpenes, ortholate (Q), para cresyl phenyl acetate, para-tert-butylcyclohexanol, para-tert-butylcyclohexanyl acetate, pelargene (Q), petiole (Q), phenyl benzoate, phenyl ethyl methyl ethyl carbinol, phenylethyl isobutyrate, phenylethyl methyl ethyl carbinol, phenylethyl phenylacetate, phenylethyl salicylate, pinenes, pivacyclene (Q), rhubafuran (Q), rose oxide, roseacetone, rosyrene (Q), terpinyl acetate, tetrahydrogeraniol, tetrahydrogeranyl acetate, tetrahydrolinalol, tetrahydrolinalyl acetate, tetrahydromyrcenol, thymol, undecanal, undecen-2-nitrile, yara yara.

Materials identified by (Q) above are trade marks or trivial names, and available from Quest International. Materials identified by (IFF) above are trade marks or trivial names, and are available from International Flavours and Fragrances.

The shell capsules may be prepared using a range of conventional methods known to those skilled in the art for making shell capsules such as coacervation, interfacial polymerisation and polycondensation.

The process of coacervation typically involves encapsulation of a generally water-insoluble material by the precipitation of colloidal material(s) onto the surface of droplets of the material. Coacervation may be simple e.g. using one colloid such as gelatin, or complex where two or possibly more colloids of opposite charge, such as gelatin and gum arabic or gelatin and carboxymethyl cellulose, are used under carefully controlled conditions of pH, temperature and concentration. Coacervation techniques are described, e.g. in US2800458, US2800457, GB929403, EP385534 and EP376385.

Interfacial polymerisation produces encapsulated shells from the reaction of at least one oil-soluble wall forming material present in the oil phase with at least one water-soluble wall forming material present in the aqueous phase. A polymerisation reaction between the two wall-forming materials occurs resulting in the formation of covalent bonds at the interface of the oil and aqueous phases to form the capsule wall. An example of a shell capsule produced by this method is a polyurethane capsule.

Polycondensation involves forming a dispersion or emulsion of water-insoluble material e.g. perfume in an aqueous solution of precondensate of polymeric materials under appropriate conditions of agitation to produce capsules of a desired size, and adjusting the reaction conditions to cause condensation of the precondensate by acid catalysis, resulting in the condensate separating from solution and surrounding the dispersed water-insoluble material fill to produce a coherent film and the desired micro-capsules. Polycondensation techniques are described, e.g. in US3516941, US4520142, US4528226, US4681806, US4145184 and GB2073132.

A preferred method for forming shell capsules useful herein is polycondensation, typically to produce aminoplast encapsulates. Aminoplast resins are the reaction products of one or more amines with one or more aldehydes, typically formaldehyde. Non-limiting examples of suitable amines include urea, thiourea, melamine and its derivatives, benzoguanamine and acetoguanamine and combinations of amines. Suitable cross-linking agents (e.g. toluene diisocyanate, divinyl benzene, butane diol diacrylate etc.) may also be used and secondary

wall polymers may also be used as appropriate, as described in the prior art e.g. anhydrides and their derivatives, particularly polymers and co-polymers of maleic anhydride as disclosed in WO02/074430. For example, good results have been obtained with aminoplast capsules of mixed resins of urea/formaldehyde, maleic anhydride copolymers and melamine/formaldehyde.

Thus, preferably, the shell capsules are aminoplast capsules, more preferably based on melamine, singly or in combination with other suitable amines, crosslinking agents and secondary polymers.

By modifying process conditions shell capsules of a desired size can be produced in known manner. The shell capsules typically have a mean diameter in the range 1 to 500 microns, preferably 1 to 300 microns, more preferably 1 to 50 microns and most preferably 1 to 10 microns. Preferred sizes for the shell capsules will depend upon their intended use. For example, shell capsules employed in shampoos, rinse conditioners, laundry powders, sheet conditioners and household cleaning products preferably have a mean diameter in the range 1 to 10 microns, most preferably 1 to 5 microns. If necessary, the shell capsules as initially produced may be filtered or screened to produce a product of greater size uniformity.

The shell capsules comprise a coating on the inner surface, the outer surface, or both the inner and outer surfaces of the shell wall. In general, the shell of the capsules useful herein can be considered as made up of a very tight collection of strands of polymer(s) which generally provides a barrier to the encapsulated material. It is thought however, that when the shell capsules are mixed with a surfactant-containing and/or solvent-containing composition e.g. consumer product, the surfactant and/or solvent present in the composition swells the shell and sufficiently separates the strands of polymer to produce pores through which the encapsulated material may pass and/or that the original wall structure contains voids or imperfections through which the encapsulated material may pass. This is a particular problem when the encapsulated material is to some extent surfactant and/or solvent soluble e.g. perfume, as typically, the encapsulated material will

be lost to the composition over a relatively short period of time. It has been found by the present inventors, however, that the application of a coating to the inner surface and/or outer surface of the shell wall improves the barrier properties of the shell and thus may enhance retention of the encapsulated materials in surfactant-containing and/or solvent-containing compositions. Without wishing to be bound or limited by theory, it is thought that the coating stiffens the shell to prevent it swelling when in contact with surfactant and/or solvent and/or the coating blocks any pores created when the shell is swollen and/or blocks any voids or pores that were originally present in the shell. A coating may be partial or complete. Preferably, the one or more coatings are complete, so that the shell capsules are thus preferably substantially impermeable.

The application of a coating to the inner surface of the shell capsules may be carried out by a number of methods. One approach involves the use of a suitable material for the coating which is insoluble in the material to be encapsulated, but can be dissolved in a water-soluble solvent e.g. ethanol, carbitol etc., which is miscible with the material to be encapsulated. The approach involves dissolving the coating material, typically a polymer, in the solvent and then dissolving this mixture in the material to be encapsulated. The material to be encapsulated is then emulsified into e.g. a standard aminoplast capsule forming aqueous solution. As the emulsion forms, the solvent is lost to the water and the polymer precipitates out from solution at the surface of the emulsion droplets, forming a film at the interface of water/material to be encapsulated. The normal encapsulation process is then carried out and the coating deposited on the inner surface of the shell. In this case the coating material is typically water-insoluble, but this is not essential.

In a further approach, a material is used that is immiscible with both the material to be encapsulated and water, and is capable of forming a thin film at the water interface. An example of such a material is a silicone. If this material e.g. silicone is a liquid, a shell encapsulate comprising a coating of silicone on the inner surface of the shell can be prepared by dispersing the material to be encapsulated within the silicone and then emulsifying this mixture so that an emulsion is formed where droplets of encapsulated material are surrounded by a thin film of silicone. The encapsulation process is then

carried out as normal. Alternatively, a thin film may be formed at the surface by dispersing the material to be encapsulated in water, adding the second material e.g. silicone and allowing it to coat the encapsulating material droplets subsequently.

An inner surface coating is preferably made from a film-forming polymer, e.g. selected from: poly(ethylene-maleic anhydride), polyamine, waxes e.g. carbowax, polyvinylpyrrolidone (PVP) and its co-polymers such as polyvinylpyrrolidone-ethyl acrylate (PVP-EA), polyvinylpyrrolidone-vinyl acrylate, polyvinylpyrrolidone methylacrylate (PVP-MA), polyvinylpyrrolidone/vinyl acetate, polyvinyl acetal, polyvinyl butyral, polysiloxane, poly(propylene maleic anhydride), maleic anhydride derivatives and co-polymers of the above, e.g. polyvinyl methyl ether/maleic anhydride. Preferably, the inner wall coating comprises polysiloxane, PVP or PVP co-polymers, more preferably PVP or PVP co-polymers, and even more preferably PVP co-polymers, particularly polyvinylpyrrolidone-methyl acrylate or polyvinylpyrrolidone-ethyl acrylate.

A coating may be applied to the outer surface of a shell capsule by a variety of conventional coating techniques including spraying, fluid bed coating, precipitating etc. For example a coating, typically of polymer, may be precipitated from aqueous solution to condense onto the outer surface of the capsule e.g. in the form of a capsules slurry, with precipitation being caused to occur e.g. by change of temperature, change of pH or addition of salt. The shell capsule to be coated is thus formed in a separate step, prior to the application of the coating to the outer surface of the shell wall. Depending on the composition of the outer surface coating, a coated shell capsule may be prepared for example, by coacervation or polycondensation.

The outer surface coating typically comprises high molecular weight, film-forming polymers, which may optionally be crosslinked. By "high molecular weight" is meant a molecular weight of greater than 5000. The polymer maybe water-soluble or water-insoluble, and is preferably water-soluble. Generally, low molecular weight water-soluble materials (e.g. short chain saccharides) are not suitable. Non-limiting examples of suitable polymers include; polyvinyl alcohol (PVOH), styrene-butadiene latex, gelatin, gum arabic,

carboxymethyl cellulose, carboxymethyl hydroxyethyl cellulose, hydroxyethyl cellulose, other modified celluloses, sodium alginate, chitosan, casein, pectin, modified starch, polyvinyl acetal, polyvinyl butyral, polyvinyl methyl ether/maleic anhydride, polyvinyl pyrrolidone (PVP) and its co-polymers (e.g. polyvinylpyrrolidone/vinyl acetate (PVP/VA), poly(vinyl pyrrolidone/dimethylaminoethyl methacrylate) (PVP/DMAEMA) e.g. Gafquat 755N ex ISP Corporation (Gafquat 755N is a Trade Mark), poly(vinyl pyrrolidone/methacrylamidopropyl trimethyl ammonium chloride) e.g. Gafquat HS 100 ex ISP Corporation (Gafquat HS100 is a Trade Mark), melamine-formaldehyde and urea-formaldehyde.

Preferably, the outer surface of the shell is coated with polyvinyl alcohol, PVP or a PVP co-polymer. Polyvinyl alcohol is available in a number of different grades, differing in terms of molecular weight (low, medium or high) and levels of hydrolysis (low, medium, high or fully hydrolysed). Levels of hydrolysis of polyvinyl alcohol can be categorised as follows:

Fully hydrolysed:	>98%
High hydrolysis (nearly fully hydrolysed):	95-98%
Medium hydrolysis:	85-94%
Low hydrolysis:	<85%

Molecular weights of polyvinyl alcohol can be categorised as follows:

Low MW	<50,000
Medium MW	>50,000 and <125,000
High MW	>125,000

While polyvinyl alcohol having a high hydrolysis level and high molecular weight is likely to give better barrier properties, such materials can be harder to work with: the viscosity of the reaction mixture increases with the molecular weight of the polyvinyl alcohol and use of high molecular weight material tends to produce mixtures that have undesirably high

viscosities; further, fully hydrolysed polyvinyl alcohol can be difficult to work with. Polyvinyl alcohol having a medium level of hydrolysis and low molecular weight is current favoured in terms of overall properties and behaviour. Polyvinyl alcohol is commercially available from a number of suppliers including Celanese Chemicals (under the Trade Mark Celvol) and Nippon Gohsei (under the Trade Mark Gohsenol). Typical materials useful in the invention include the following:

Gohsenol NL-05, Celvol 305, Celvol 103	fully hydrolysed (>98%), low MW
Gohsenol GL-05, Celvol 203	87-89% hydrolysed, low MW
Gohsenol GL-23, Celvol 540	87-89% hydrolysed, high MW
Gohsenol KL-05	78-82% hydrolysed, low MW

Good results have been obtained with PVOH (high MW, high hydrolysis) and PVP-DMAEMA, and these materials are currently favoured.

The coating (inner and/or outer) may be cross-linked in known manner, e.g. by interfacial cross-linking.

A shell capsule useful herein may comprise more than one coating on the outer surface of the shell.

Coated shell capsules typically have a wall thickness in the range 0.01 to 30 microns, preferably 0.01 to 5 microns, more preferably 0.03 to 1 microns, most preferably 0.03 to 0.5 microns. The wall thickness may be regulated and controlled according to the encapsulate size and by varying the relative proportions of coating and shell polymer.

The weight ratio of coating to shell wall is typically in the range of 0.01 to 10:1, preferably 0.1:1 to 10:1, more preferably 0.1:1 to 3:1.

Typically, the weight ratio of polymer shell wall material to encapsulated material is in the range 1:10 to 3:2 and preferably in the range 1:10 to 1:2. The coating on the inner surface and/or outer surface will increase these weight ratios.

The solvent of the composition may be selected from those well known to those skilled in the art, and include propylene glycol, dipropylene glycol, diethylene glycol monoethyl ether, isopropyl myristate, ethanol, isopropyl alcohol, butyl alcohol, diethylene glycol monobutyl ether, glycerin, dipropylene glycol mono-n-butyl ether, orange oil and mineral oil.

The surfactant of the composition may be selected from those well known to those skilled in the art, including anionic surfactants, nonionic surfactants, cationic surfactants, amphoteric surfactants, zwitterionic surfactants and mixtures thereof. Appropriate surfactant(s) will depend on the nature of the composition, as discussed above, as is known to those skilled in the art. Anionic surfactants include soaps, synthetic detergent surfactants, sulphate surfactants, sulphonate surfactants and N-acylamino surfactants. Nonionic surfactants include alkyl phenol ethoxylates, polyethylene glycol/polypropylene glycol block copolymers, fatty alcohol and fatty acid ethoxylates, long chain tertiary amine oxides, long chain tertiary phosphine oxides, long chain dialkyl sulphoxides, alkyl polysaccharides and polyethylene glycol glyceryl fatty esters. For further details of surfactants see, e.g., WO 96/12468 page 8 to 21.

The weight ratio of solvent/surfactant: capsules in the composition is conveniently in the range 100:1 to 5:1.

Incorporation of the capsules into compositions containing solvent and/or surfactant may be conveniently achieved by addition of the capsule slurry by a variety of mixing techniques that are well known to those skilled in the art. Alternatively, addition to substantially dry compositions (e.g. laundry powders) can be achieved by first drying the capsule slurry (e.g. by spray-drying) followed by dry mixing.

As discussed above, the coated shell capsules described herein, possess improved impermeability properties in surfactant-containing and/or solvent-containing compositions compared with the uncoated shell encapsulates of the prior art. Thus, advantageously, when shell capsules comprising a coating on the inner surface and/or outer surface of the shell are incorporated in surfactant-containing and/or solvent-containing compositions, the coated shell capsules demonstrate improved retention of the encapsulated material and thus demonstrate improved in-storage stability. Coated shell capsules comprising encapsulated material such as perfume, when incorporated in a shampoo, typically prevent perfume from leaching from the encapsulates for weeks and possibly months. By contrast, perfume-containing uncoated shell capsules of the prior art tend to leach perfume from the encapsulates over days, e.g. at 45°C.

In a further aspect, the present invention provides capsules comprising encapsulated perfume, the perfume being encapsulated within an aminoplast capsule which comprises a coating of polyvinyl alcohol, polyvinyl pyrrolidone or a co-polymer polyvinyl pyrrolidone (preferably PVP/DMAEMA) on the outer surface of the shell and/or a coating of a film-forming polymer (preferably polyvinyl pyrrolidone-ethyl acrylate) on the inner surface.

The invention will be further described, by way of illustration, in the following examples.

Examples

The following formulations are used in the Examples.

Perfume A - this perfume is used in all the capsule examples below and is supplied by Quest International under the code HW 4180B.

Shampoo Base B - the following hair shampoo formulation is used in Comparative Examples 1, 2 and 4 below:

Ingredient

% by weight

Sodium lauryl ether (2 mole) sulphate	9.6
Ammonium lauryl ether (2 mole) sulphate	4.5
Sodium chloride	2.0
Euperlan PK 3000 AM*	1.0
Citric acid	q.s. to give pH 6.0-6.5
Preservative	q.s.
Water	balance to 100%

*ex Cognis, Germany (Euperlan is a Trade Mark)

Rinse Conditioner Base C - the following rinse conditioner formulation is used in Comparative Example 3 below:

<u>Ingredient</u>	<u>% by weight</u>
Rewoquat WE18 *	16.7
CaCl ₂ (10% aq)	0.5
Formaldehyde	0.1
Distilled water	to 100.0

* Rewoquat WE18 is a dehydrogenated tallowethyl hydroxyethylmonium methosulphate (Rewoquat is a Trade Mark) ex Goldschmidt (a division of Degussa AG).

Preparation

The water is heated to 50°C. Separately, Rewoquat is heated to 50°C and then slowly dispersed into the water and stirred until cool. Formaldehyde is then added and mixed well. The calcium chloride solution is slowly added and mixed for five minutes.

Reference Example 1

The following example illustrates the formation of a standard polycondensation microcapsule based on melamine/formaldehyde polymer. A solution of 66g of a 10 % solution of Versa TL502 (a sodium polystyrene sulphonate) from National Starch and Chemical Company, Bridgewater, USA (Versa TL is a Trade Mark) was added to 130g of distilled water and adjusted to a pH of 4.5 using a 20% solution of sodium hydroxide. Separately, a 40% solution of melamine in 37% formaldehyde was prepared. 100g of perfume A (the "Internal Phase") were then added to the anhydride solution, which was maintained under continuous agitation to allow the formation of an emulsion of the perfume in water. 72g of the melamine formaldehyde solution were then added. The emulsion was heated to 55°C in a water bath and held there for two hours under continuous agitation and allowed to cool overnight. The capsules produced by this method had a mean particle size of 8 μ m with a perfume content of 27% in the capsule slurry.

Example 1

This example illustrates the formation of a coating of polyvinyl pyrrolidone on the inner surface of a capsule wall. 10g of polyvinylpyrrolidone (Luviskol K-90, ex BASF) were dissolved in 90g of isopropyl alcohol. 12g of this resulting solution was then dissolved in 88g of perfume A. The resultant mixture was then agitated and warmed to 35°C for eight hours to form a clear homogeneous solution. This solution was then used as the Internal Phase to produce capsules by the method of Reference Example 1. The resultant capsules had a mean particle size of 6 μ m with a perfume content of 24.2% in the capsule slurry.

Example 2

This example illustrates the formation of a coating of silicone fluid on the inner surface of a capsule wall. 390g of perfume A was added to a laboratory mixing vessel and mixed with 24g of polysiloxane fluid (Dow Corning Silicone DC200/100). This mixture was then emulsified with a Silverson mixer for one hour. 100g of the resultant emulsion was then used as the Internal Phase to produce capsules by the method of Reference Example

1. The resultant capsules had a mean particle size of 10 μ m with a perfume content of 25.6% in the capsule slurry.

Example 3

The following example illustrates the formation of a polyvinylpyrrolidone (PVP) coating on the inner surface of a capsule wall, further strengthened by interfacial crosslinking. Capsules were prepared using the formulation illustrated in Example 1. However, the encapsulation process was modified by the inclusion of 0.3g of a crosslinking agent, toluene diisocyanate, in the PVP pre-solution. The capsules produced in this example had a mean particle size of 4 μ m with a perfume content of 24.3% in the capsule slurry.

Comparative Example 1

This example illustrates the enhanced perfume retention properties of capsules according to one approach of the invention (having a coating on the inner surface of a capsule wall) compared to standard capsules. The capsule slurries of Reference Example 1 and Examples 1-3 were mixed into unperfumed shampoo base B to produce the following formulations, each containing 0.15wt% perfume (all expressed as percent by weight):

Shampoo Code	BR1	B1	B2	B3
Shampoo base B	99.444	99.380	99.414	99.383
Reference Example 1	0.556	-	-	-
Example 1	-	0.620	-	-
Example 2	-	-	0.586	-
Example 3	-	-	-	0.617

The shampoos were then stored in glass jars for one month at 37°C and examined by transmission light microscopy to determine the degree of perfume loss from the capsules. The capsules in shampoo BR1 were found to be completely empty whilst the capsules in

shampoos B1, B2 and B3 were all found to contain significant levels of perfume, thus illustrating the utility of the invention.

Example 4

This example illustrates the formation of a coating of polyvinyl alcohol on the outer surface of a capsule wall using capsules of reference Example 1. Perfume containing microcapsules were prepared using the method outlined in Reference Example 1. At the completion of the 2 hours at 55°C, the microcapsule emulsion was heated to 80°C. Simultaneously, a 20% solution of polyvinyl alcohol (Celvol 203 (low molecular weight, 87-98% hydrolysed), ex Celanese Chemicals) in water was prepared and heated to 80°C. 60g of the polyvinyl alcohol solution were added to the warmed microcapsule slurry and agitation continued for 24 hours during which time the mixture cools slowly. The polyvinyl alcohol precipitates onto the microcapsules thus forming a coating. The final microcapsule slurry had a perfume content of 23.4%.

Example 5

This example illustrates the formation of a coating of polyvinyl acetal on the outer surface of a capsule wall using capsules of reference example 1. Perfume containing microcapsules are prepared using the method outlined in Reference Example 1. At the completion of the 2 hours at 55°C, the microcapsule emulsion was heated to 80°C. Simultaneously, a 20% solution of polyvinyl alcohol (Celvol 203, ex Celanese Chemicals) in water was prepared and heated to 80°C. 60g of the polyvinyl alcohol solution were added to the warmed microcapsule slurry. The pH was then adjusted to 4.5 using sulphuric acid and 6g of 37% formaldehyde was added to the mixture. Agitation was continued for 24 hours during which time the mixture cools slowly. During this time, polyvinyl acetal is formed and precipitates onto the microcapsules forming a coating. The final microcapsule slurry had a perfume content of 23.0%.

Example 6

This example illustrates the formation of a coating of a water-insoluble polyvinyl pyrrolidone/vinyl acetate copolymer on the outer surface of a capsule wall using reference example 1. Perfume containing microcapsules are prepared using the method outlined in Reference Example 1. At the completion of the 2 hours at 55°C, the microcapsule emulsion is maintained at 55°C. Simultaneously, a 10% solution of polyvinyl pyrrolidone/vinyl acetate copolymer (ISP S630 from ISP Corporation) in isopropyl alcohol was prepared and heated to 55°C. 40g of the polyvinyl pyrrolidone/vinyl acetate copolymer solution were added to the warmed microcapsule slurry and agitation was continued for 4 hours at 55°C. The mixture was then allowed to cool under agitation for a further 24 hours. The polyvinyl pyrrolidone/vinyl acetate copolymer precipitates onto the microcapsules as the isopropyl alcohol evaporates from the mixture. The final microcapsule slurry contained 26.8% perfume.

Example 7

This example illustrates the formation of a coating of carboxymethyl cellulose (CMC) on the outer surface of a capsule wall using capsules of reference example 1. A 10% aqueous solution of carboxymethyl cellulose (Finea 10 (Finea is a Trade Mark)) was prepared by mixing and heating until a clear homogeneous solution was formed. Meanwhile, the capsule slurry of Reference Example 1 was spray-dried to form a free-flowing powder using a laboratory spray dryer (Buchi Model 190, ex Buchi Labortechnik AG). The resultant powder was then charged into a laboratory fluid bed dryer (Glatt Model TR 5) and the capsules were coated by spraying of the CMC solution using standard fluid bed coating techniques to achieve a coating thickness of 0.4µm. The resultant capsules were analysed and found to contain 79% perfume.

Comparative Example 2

This example illustrates the enhanced perfume retention properties of capsules according to another approach of the invention (having a coating on the outer surface of a capsule wall)

compared to standard capsules. The capsule slurries of Reference Example 1 and Examples 4-7 were mixed into unperfumed shampoo base B to produce the following formulations, each containing 0.2wt% perfume (all expressed as percent by weight):

Shampoo Code	BR2	B4	B5	B6	B7
Shampoo base B	99.259	99.145	99.130	99.254	99.747
Reference Example 1	0.741	-	-	-	-
Example 4	-	0.855	-	-	-
Example 5	-	-	0.870	-	-
Example 6	-	-	-	0.746	-
Example 7	-	-	-	-	0.253

The shampoos were then stored in glass jars for one month at 37°C and examined by transmission light microscopy to determine the degree of perfume loss from the capsules. The capsules in shampoo BR2 were found to be completely empty whilst the capsules in shampoos B4, B5, B6 and B7 were all found to contain significant levels of perfume, thus illustrating the utility of the invention.

Figure 1 shows transmission light micrographs illustrating the relative stability of the capsules in shampoos BR2 and B4. Perfume retention in shampoo B4 is clearly enhanced.

Comparative Example 3

This example illustrates the enhanced perfume retention properties of capsules according to the invention compared to standard capsules. The capsule slurries of Reference Example 1 and Examples 1, 4, 6 and 7 were mixed into unperfumed rinse conditioner base C to produce the following formulations, each containing 0.2wt% perfume (all expressed as percent by weight):

Conditioner Code	CR1	C1	C4	C6	C7
------------------	-----	----	----	----	----

Conditioner base C	99.259	99.174	99.145	99.254	99.747
Reference Example 1	0.741	-	-	-	-
Example 1	-	0.826	-	-	-
Example 4	-	-	0.855	-	-
Example 6	-	-	-	0.746	-
Example 7	-	-	-	-	0.253

The rinse conditioners were then stored in glass jars for one month at 37°C and examined by transmission light microscopy to determine the degree of perfume loss from the capsules. The capsules in conditioner CR1 were found to be completely empty whilst the capsules in conditioners C1, C4, C6 and C7 were all found to contain significant levels of perfume, thus illustrating the utility of the invention.

Reference Example 2

This example illustrates the formation of a typical complex coacervate encapsulate. 25g of acid-treated gelatin (isoelectric point 8, gel strength 180g Bloom) and 2.5g of carboxymethyl cellulose (Blanose Gum, ex ISP Corporation, New Jersey, USA) were added to 700g water and mixed with heating at 60°C until a clear homogeneous solution was formed. The pH was then adjusted to 5.5 with a 5% aqueous solution of sodium hydroxide and then cooled to 10°C. 100g of perfume A was then added to this solution whilst mixing was maintained to generate an emulsion of perfume. 25g of 10% aqueous formaldehyde was then mixed into the emulsion and left to stand for 15 minutes. The pH of the emulsion was then adjusted to 10 by dropwise addition of a 10% aqueous solution of NaOH, causing the formation of hardened microcapsules. The resulting slurry was analysed and found to contain 11.7 % perfume by weight. The capsules produced by this method had a mean particle size of 12µm.

Example 8

This example illustrates the formation of a coating of polyvinyl alcohol on the outer surface of a capsule using capsules of reference example 2. Perfume containing microcapsules are prepared using the method outlined in Reference Example 2. At the completion of hardening of the capsule walls, the microcapsule emulsion was heated to 80°C. Simultaneously, a 20% solution of polyvinyl alcohol (Celvol 203, ex Celanese Chemicals) in water was prepared and heated to 80°C. 60g of the polyvinyl alcohol solution were then added to the warmed microcapsule slurry and agitation continued for 24 hours during which time the mixture cooled slowly. The polyvinyl alcohol precipitates onto the microcapsules thus forming a coating. The microcapsule slurry was measured to have a final perfume content of 11.0%.

Example 9

This example illustrates the formation of a coating of polyvinyl acetal on the outer surface of a capsule using capsules of reference example 2. Perfume containing microcapsules are prepared using the method outlined in Reference Example 2. At the completion of hardening of the capsule walls, the microcapsule emulsion was heated to 80°C. In parallel, a 20% solution of polyvinyl alcohol (Celvol 203, ex Celanese Chemicals) in water was prepared and heated to 80°C. 60g of the polyvinyl alcohol solution was added to the warmed microcapsule slurry and pH adjusted to 4.5 using sulphuric acid. 6g of 37% formaldehyde were then added to the mixture. Agitation was continued for 24 hours during which time the mixture cools slowly. The polyvinyl acetal is formed and precipitates onto the microcapsules. The final microcapsule slurry contained 10.8% perfume.

Example 10

This example illustrates the formation of a coating of polyvinyl pyrrolidone/vinyl acetate copolymer on the outer surface of a capsule. Perfume containing microcapsules are prepared using the method outlined in Reference Example 2. At the completion of hardening of the capsule walls, the microcapsule emulsion was heated to 55°C. A 10%

solution of polyvinyl pyrrolidone/vinyl acetate copolymer (ISP S630, ex ISP Corporation) in isopropyl alcohol was prepared and heated to 55°C. 40g of the polyvinyl pyrrolidone/vinyl acetate copolymer solution were added to the warmed microcapsule slurry and agitation continued for 4 hours at 55°C. The mixture was then allowed to cool under agitation for a further 24 hours. The polyvinyl pyrrolidone/vinyl acetate copolymer was precipitated onto the microcapsules as the isopropyl alcohol evaporates from the mixture. The measure perfume level in the capsule slurry was 11.6%.

Example 11

This example illustrates the formation of a coating of carboxymethyl cellulose (CMC) onto the outer surface of a capsule using capsules of reference example 2. A 10% aqueous solution of carboxymethyl cellulose (Finea 10) was prepared by mixing and heating until a clear homogeneous solution was formed. Meanwhile, the capsule slurry of Reference Example 2 was spray-dried to form a free-flowing powder using a laboratory spray dryer (Buchi Model 190). The resultant powder was then charged into a laboratory fluid bed dryer (Glatt Model TRS) and the capsules were coated by spraying of the CMC solution using standard fluid bed coating techniques to achieve a coating thickness of 0.6µm. The resultant capsules were analysed and found to contain 16% perfume.

Comparative Example 4

This example illustrates the enhanced perfume retention properties of capsules according to the approach of the invention (having a coating on the outer surface of a capsule wall) compared to standard capsules. The capsule slurries of Reference Example 2 and Examples 8-10 were mixed into unperfumed shampoo base B to produce the following formulations (all expressed as percent by weight):

Shampoo Code	BR2	B8	B9	B10
Shampoo base B	98.29	98.18	98.15	98.28

Reference Example 2	1.71	-	-	-
Example 8	-	1.82	-	-
Example 9	-	-	1.85	-
Example 10	-	-	-	1.72

The shampoos were then stored in glass jars for one week at 37°C and examined by transmission light microscopy to determine the degree of perfume loss from the capsules. The capsules in shampoo BR2 were found to be completely empty whilst the capsules in shampoos B8, B9 and B10 were found to contain significant levels of perfume, thus illustrating the utility of the invention.

Example 12

This example illustrates the formation of a capsule with coatings on both the inner and outer surfaces of the capsule wall. 10g of polyvinylpyrrolidone (Luviskol K-90, ex BASF) were dissolved into 90g of isopropyl alcohol. 12g of this resulting solution were then dissolved in 80g of perfume A. The resultant mixture was then agitated and warmed to 35°C for eight hours to form a clear homogenous solution. This solution was then used as the Internal Phase to produce capsules by the method of Reference Example 1. At the completion of the 2 hours at 55°C, the microcapsule emulsion was heated to 80°C. Simultaneously, a 20% solution of polyvinyl alcohol (Celvol 203, ex Celanese Chemicals) in water was prepared and heated to 80°C. 60g of the polyvinyl alcohol solution were added to the warmed microcapsule slurry and agitation continued for 24 hours during which time the mixture cooled slowly. The polyvinyl alcohol precipitates onto the microcapsules thus forming a coating and hence creating an outer wall. The final microcapsule slurry had a perfume content of 22.3%.

Reference Example 3

The following example illustrates the formation of a microcapsule based on mixed resins of urea/formaldehyde, poly(propylene/maleic anhydride) and melamine/formaldehyde

polymers. 100g of a 10wt% solution of poly(propylene maleic anhydride) was mixed with 200g of distilled water and adjusted to a pH of 4.5 using a 20wt% solution of sodium hydroxide. Separately, a 60wt% aqueous solution of methylol melamine (Resimene 814, ex Monsanto - Resimene 814 is a Trade Mark) was prepared. 35g of this methylol melamine solution was added to 150g of the poly(propylene maleic anhydride) solution in a laboratory mixing vessel and stirred with a standard laboratory paddle mixer. A solution of 20g of water and 9g of urea was prepared in a beaker with stirring by heating to 40°C for 1 hour. Into this urea solution 0.5g of resorcinol was dissolved. The urea solution was then added to the above methylol melamine solution and the combined mix was stirred and cooled over 24 hours. 150g of perfume A (the "Internal Phase") was then added to the combined solution which was maintained under continuous agitation to allow the formation of an emulsion of the perfume. The emulsion was then heated to 55°C in a water bath and held there for two hours under continuous agitation to allow capsule formation. The capsules produced by this method had a mean particle size of 3 μ m with a perfume content of approximately 23wt% in the capsule slurry.

Example 13

This example illustrates the formation of a coating of polyvinyl pyrrolidone/ methyl acrylate co-polymer (PVP-MA) on the inner surface of a capsule wall. 15g of PVP-MA were dissolved in 90g of isopropyl alcohol. 10g of this resulting solution was then dissolved in 90g of perfume A. The resultant mixture was then agitated and warmed to 35°C for four hours to form a clear homogeneous solution. This solution was then used as the Internal Phase to produce capsules by the method of Reference Example 3. The resultant capsules had a mean particle size of 7 μ m with a perfume content of approximately 20% in the capsule slurry.

Example 14

This example illustrates the formation of a coating of polyvinyl pyrrolidone/dimethylaminoethyl methacrylate copolymer (PVP/DMAEMA) on the outer

surface of a capsule. Perfume containing microcapsules were prepared using the method outlined in Reference Example 3. At the completion of hardening of the capsule walls, the microcapsule emulsion was heated to 55°C. 25g of the PVP/DMAEMA copolymer solution (Gafquat 755N ex ISP Corporation, New Jersey, USA) were added to the warmed microcapsule slurry and agitation continued for 4 hours at 55°C. The mixture was then allowed to cool under agitation for a further 24 hours, causing the PVP/DMAEMA copolymer to precipitate onto the microcapsules. The resultant capsules had a mean particle size of 3 μ m and a measured perfume level in the capsule slurry of 21.8%.

Example 15

This example illustrates the formation of a coating of polyvinyl pyrrolidone/ methyl acrylate co-polymer (PVP-MA) on the inner surface of a capsule wall and a coating of polyvinyl pyrrolidone/dimethylaminoethyl methacrylate copolymer (PVP/DMAEMA) on the outer surface. Perfume containing microcapsules were prepared using the method outlined in Example 13. At the completion of the hardening of the capsule walls, the microcapsule emulsion was heated to 55°C. 35g of PVP/DMAEMA copolymer solution (Gafquat 440 ex ISP Corporation, New Jersey, USA) were added to the warmed microcapsule slurry and agitation continued for 5 hours at 55°C. The mixture was then allowed to cool under agitation for a further 24 hours, causing the PVP/DMAEMA copolymer to deposit onto the microcapsules. The resultant capsules had a mean particle size of approximately 7 μ m and a measured perfume level in the slurry of 18.0%.

Reference Example 4

The following example illustrates the formation of a microcapsule based on melamine/formaldehyde resin with two secondary polymers of 2-acrylamido-2-methyl propane sulphonic acid and poly(propylene maleic anhydride). 42g of a 10wt% solution of poly(propylene maleic anhydride) was added to 108g of distilled water and adjusted to a pH of 4.5 using a 20wt% solution of sodium hydroxide. Separately, a 60wt% aqueous solution of methylol melamine (Resimene 814, ex Monsanto) was prepared. 45g of this

solution was added to 138g of distilled water in a laboratory mixing vessel and stirred with a standard laboratory paddle mixer. A solution of 29g of water and 4 g of 2-acrylamido-2-methyl propane sulphonic acid (AMPS monomer) was prepared in a beaker with stirring by heating to 55°C for 3 hours. The AMPS monomer solution was then added to the above methyol melamine solution and the combined mix was stirred and cooled over 24 hours. 165g of perfume A (the "Internal Phase") was then added to the combined solution which was maintained under continuous agitation to allow the formation of an emulsion of the perfume. By dropwise addition, 0.2g of toluene di-isocyanate was added. The emulsion was then heated to 55°C in a water bath and held there for eight hours under continuous agitation to allow capsule formation. The capsules produced by this method had a mean particle size of 3 μ m with a perfume content of approximately 31% in the capsule slurry.

Example 16

This example illustrates the formation of a coating of polyvinyl pyrrolidone/ethyl acrylate (PVP-EA) on the inner surface of a capsule wall. 14g of PVP-EA were dissolved in 86g of isopropyl alcohol. 10g of this resulting solution was then dissolved in 90g of perfume A. The resultant mixture was then agitated and warmed to 35°C for three hours to form a clear homogeneous solution. This solution was then used as the Internal Phase to produce capsules by the method of Reference Example 4. The resultant capsules had a mean particle size of 5 μ m with a perfume content of approximately 28% in the capsule slurry.

Example 17

This example illustrates a coating of polyvinyl pyrrolidone/ethyl acrylate (PVP-EA) on the inner surface of a capsule wall combined with a coating of polyvinyl alcohol (PVOH) on the outer surface of the capsule wall. Perfume containing microcapsules are prepared using the method described in Example 16. At the completion of the capsule forming process, the microcapsule emulsion was heated to 80°C. Simultaneously, a 20% solution of polyvinyl alcohol (Celvol 203, ex Celanese Chemicals) in water was prepared and

heated to 80°C. 70g of the polyvinyl alcohol solution were then added to the warmed microcapsule slurry and agitation continued for 24 hours during which time the mixture cooled slowly. The polyvinyl alcohol precipitates onto the microcapsules thus forming a coating. The microcapsule slurry was measured to have a final perfume content of 26.2%.

Example 18

This example illustrates the preparation of capsules in a substantially water-free form. Capsule slurry was prepared using the method of example 14. The capsule slurry was then spray-dried to form a free-flowing powder using a laboratory spray dryer (Buchi Model 190).

CLAIMS

1. A composition comprising material encapsulated within shell capsules, each capsule comprising an encapsulating wall having an inner surface and an outer surface, with a coating on the inner surface and/or outer surface of the shell wall; and surfactant and/or solvent.
2. A composition according to claim 1, wherein the composition is a product, particularly a consumer product.
3. A composition according to claim 2, wherein the product is a water-based product.
4. A composition according to any one of the preceding claims, wherein the encapsulated material comprises a first material which is at least partially, preferably substantially and more preferably completely soluble, in the surfactant and/or solvent of the composition.
5. A composition according to claim 4, wherein the first material is a perfume.
6. A composition according to claim 4, wherein the first material is a dental flavour.
7. A composition according to claim 4, wherein the first material is an agrichemical.
8. A composition according to claim 4, wherein the first material is a cosmetic ingredient.
9. A composition according to claim 4, wherein the first material is an insect repellent.

10. A composition according to claim 4, wherein the first material is an antimicrobial agent or a deodorant active.
11. A composition according to claim 5, wherein the perfume is in the form of a perfume composition, which comprises at least 80% and preferably at least 90% by weight of the total weight of the perfume composition of perfume materials having an octanol-water partition coefficient of greater than 2.5 (in logarithmic form to base 10).
12. A composition according to claim 11, wherein less than 35%, and preferably less than 20%, by weight of the total weight of the perfume composition comprises perfume materials having an octanol-water partition coefficient of greater than 5 (in logarithmic form to base 10).
13. A composition according to any one of the preceding claims, wherein the shell capsules are prepared by coacervation, interfacial polymerisation or polycondensation.
14. A composition according to claim 13, wherein the shell capsules are aminoplast capsules.
15. A composition according to claim 14, wherein the shell capsules are aminoplast capsules, based on melamine, singly or in combination with other suitable amines, crosslinking agents and secondary polymers.
16. A composition according to claim 14, wherein the aminoplast capsules comprise a mixed resin of urea/formaldehyde, maleic anhydride copolymer(s) and melamine/formaldehyde polymers.
17. A composition according to any one of the preceding claims, wherein the shell capsules have a diameter in the range 1 to 500 microns, preferably 1 to 300 microns, more preferably 1 to 50 microns, most preferably 1 to 10 microns.

18. A composition according to any one of the preceding claims, wherein the inner surface of the shell wall is coated with a film-forming polymer.
19. A composition according to claim 18, wherein the polymer is selected from: poly(ethylene-maleic anhydride), polyamine, waxes e.g. carbowax, polyvinylpyrrolidone (PVP) and its co-polymers such as polyvinylpyrrolidone-ethyl acrylate (PVP-EA), polyvinylpyrrolidone-vinyl acrylate, polyvinylpyrrolidone methylacrylate (PVP-MA), polyvinylpyrrolidone/vinyl acetate, polyvinyl acetal, polyvinyl butyral, polysiloxane, poly(propylene/maleic anhydride), maleic anhydride derivatives and co-polymers of the above, e.g. polyvinyl methyl ether/maleic anhydride.
20. A composition according to claim 19, wherein the polymer is selected from: polyvinylpyrrolidone (PVP) and its co-polymers such as polyvinylpyrrolidone-ethyl acrylate (PVP-EA), polyvinylpyrrolidone-vinyl acrylate, polyvinylpyrrolidone methylacrylate (PVP-MA) and polyvinylpyrrolidone/vinyl acetate.
21. A composition according to any one of the preceding claims, wherein the outer surface of the shell wall is coated with a high molecular weight, film-forming polymer, which may optionally be crosslinked.
22. A composition according to claim 21, wherein the polymer is water-soluble.
23. A composition according to claim 21 or 22, wherein the polymer is selected from: polyvinyl alcohol, styrene-butadiene latex, gelatin, gum arabic, carboxymethyl cellulose, carboxymethyl hydroxyethyl cellulose, hydroxyethyl cellulose, other modified celluloses, sodium alginate, chitosan, casein, pectin, modified starch, polyvinyl acetal, polyvinyl butyral, polyvinyl methyl ether/maleic anhydride, polyvinyl pyrrolidone (PVP) and its co-polymers (e.g. polyvinylpyrrolidone/vinyl acetate (PVP/VA) poly(vinyl pyrrolidone/dimethaminoethyl methacrylate) (PVP/DMAEMA), poly(vinyl pyrrolidone/methacrylamidopropyl trimethyl ammonium chloride), melamine-formaldehyde and urea-formaldehyde).

24. A composition according to claim 23, wherein the polymer is selected from: polyvinyl alcohol, polyvinyl pyrrolidone (PVP) and its co-polymers (e.g. polyvinylpyrrolidone/vinyl acetate (PVP/VA) poly(vinyl pyrrolidone/dimethylaminoethyl methacrylate) (PVP/DMAEMA), poly(vinyl pyrrolidone/methacrylamidopropyl trimethyl ammonium chloride).
25. A composition according to any one of the preceding claims, wherein the coated shell capsules have a wall thickness in the range 0.01 to 30 microns, preferably 0.01 to 5 microns, more preferably 0.03 to 1 microns, most preferably 0.03 to 0.5 microns.
26. A composition according to any one of the preceding claims, wherein the weight ratio of shell wall material to encapsulated material is in the range 1:10 to 3:2 and preferably in the range 1:10 to 1:2.
27. A composition according to any one of the preceding claims, wherein the weight ratio of solvent/surfactant: capsules in the composition is in the range 100:1 to 5:1.
28. Capsules comprising encapsulated material, the material being encapsulated within shell capsules, each capsule comprising an encapsulating wall having an inner surface and an outer surface, with a coating on the inner surface and/or outer surface of the shell wall.
29. Capsules according to claim 28, wherein the encapsulated material comprises a first material which is at least partially, preferably substantially and more preferably completely soluble, in surfactant solution and/or solvent.
30. Capsules according to claim 29, wherein the first material is a perfume.
31. Capsules according to claim 29, wherein the first material is a dental flavour.
32. Capsules according to claim 29, wherein the first material is an agrichemical.

33. Capsules according to claim 29, wherein the first material is a cosmetic ingredient.
34. Capsules according to claim 29, wherein the first material is an insect repellent.
35. Capsules according to claim 29, wherein the first material is an antimicrobial agent or a deodorant active.
36. Capsules according to claim 30, wherein the perfume is in the form of a perfume composition, which comprises at least 80% and preferably at least 90% by weight of the total weight of the perfume composition of perfume materials having an octanol-water partition coefficient of greater than 2.5 (in logarithmic form to base 10).
37. Capsules according to claim 36, wherein less than 35%, and preferably less than 20%, by weight of the total weight of the perfume composition comprises perfume materials having an octanol-water partition coefficient of greater than 5 (in logarithmic form to base 10).
38. Capsules according to any one of claims 28 to 37, wherein the shell capsules are prepared by coacervation, interfacial polymerisation or polycondensation.
39. Capsules according to claim 38, wherein the shell capsules are aminoplast capsules.
40. Capsules according to claim 39, wherein the shell capsules are aminoplast capsules, based on melamine, singly or in combination with other suitable amines, crosslinking agents and secondary polymers.
41. Capsules according to claim 39, wherein the aminoplast capsules comprise a mixed resin of urea/formaldehyde, maleic anhydride copolymer(s) and melamine/formaldehyde polymers.

42. Capsules according to any one of claims 28 to 41, wherein the shell capsules have a diameter in the range 1 to 500 microns, preferably 1 to 300 microns, more preferably 1 to 50 microns, most preferably 1 to 10 microns.
43. Capsules according to any one of claims 28 to 42, wherein the inner surface of the shell wall is coated with a film-forming polymer.
44. Capsules according to claim 43, wherein the polymer is selected from: poly(ethylene-maleic anhydride), polyamine, waxes e.g. carbowax, polyvinylpyrrolidone (PVP) and its co-polymers such as polyvinylpyrrolidone-ethyl acrylate (PVP-EA), polyvinylpyrrolidone-vinyl acrylate, polyvinylpyrrolidone methylacrylate (PVP-MA), polyvinylpyrrolidone/vinyl acetate, polyvinyl acetal, polyvinyl butyral, polysiloxane, poly(propylene/maleic anhydride), maleic anhydride derivatives and co-polymers of the above, e.g. polyvinyl methyl ether/maleic anhydride.
45. Capsules according to claim 44, wherein the polymer is selected from: polyvinylpyrrolidone (PVP) and its co-polymers such as polyvinylpyrrolidone-ethyl acrylate (PVP-EA), polyvinylpyrrolidone-vinyl acrylate, polyvinylpyrrolidone methylacrylate (PVP-MA) and polyvinylpyrrolidone/vinyl acetate.
46. Capsules according to any one of the claims 28 to 45, wherein the outer surface of the shell wall is coated with a high molecular weight, film-forming polymer, which may optionally be crosslinked.
47. Capsules according to claim 46, wherein the polymer is water-soluble.
48. Capsules according to claim 46 or 47, wherein the polymer is selected from: polyvinyl alcohol, styrene-butadiene latex, gelatin, gum arabic, carboxymethyl cellulose, carboxymethyl hydroxyethyl cellulose, hydroxyethyl cellulose, other modified celluloses, sodium alginate, chitosan, casein, pectin, modified starch, polyvinyl acetal, polyvinyl butyral, polyvinyl methyl ether/maleic anhydride, polyvinyl pyrrolidone (PVP) and its co-

polymers (e.g. polyvinylpyrrolidone/vinyl acetate (PVP/VA) poly(vinyl pyrrolidone/dimethylaminoethyl methacrylate) (PVP/DMAEMA), poly(vinyl pyrrolidone/methacrylamidopropyl trimethyl ammonium chloride), melamine-formaldehyde and urea-formaldehyde.

49. Capsules according to claim 48, wherein the polymer is selected from: polyvinyl alcohol, polyvinyl pyrrolidone (PVP) and its co-polymers (e.g. polyvinylpyrrolidone/vinyl acetate (PVP/VA) poly(vinyl pyrrolidone/dimethylaminoethyl methacrylate) (PVP/DMAEMA), poly(vinyl pyrrolidone/methacrylamidopropyl trimethyl ammonium chloride).

50. Capsules according to any one of claims 28 to 49, wherein the coated shell capsules have a wall thickness in the range 0.01 to 30 microns, preferably 0.01 to 5 microns, more preferably 0.03 to 1 microns, most preferably 0.03 to 0.5 microns.

51. Capsules according to any one of claims 28 to 50, wherein the weight ratio of shell wall material to encapsulated material is in the range 1:10 to 3:2 and preferably in the range 1:10 to 1:2.

52. Capsules comprising encapsulated perfume, the perfume being encapsulated within an aminoplast capsule which comprises a coating of polyvinyl alcohol, polyvinyl pyrrolidone or a co-polymer of polyvinyl pyrrolidone on the outer surface of the shell, and/or a coating of a film-forming polymer on the inner surface.

53. Capsules according to claim 52, wherein the capsule includes a coating on the outer surface of the shell comprising polyvinyl alcohol and/or poly(vinyl pyrrolidone/dimethylaminoethyl methacrylate).

54. Capsules according to claim 52 or 53, wherein the capsules have a diameter in the range 1 to 50 microns, preferably 1 to 10 microns.


55. Capsules according to claim 52, 53 or 54, wherein the perfume is in the form of a perfume composition, which comprises at least 80% and preferably at least 90% by weight of the total weight of the perfume composition of perfume materials having an octanol-water partition coefficient of greater than 2.5 (in logarithmic form to base 10).

56. Capsules according to claim 55, wherein less than 35%, and preferably less than 20%, by weight of the total weight of the perfume composition comprises perfume materials having an octanol-water partition coefficient of greater than 5 (in logarithmic form to base 10).


57. Capsules according to any one of claims 52 to 56, wherein the capsule includes a coating on the inner surface of the shell comprising one or more polymers selected from: poly(ethylene-maleic anhydride), polyamine, waxes e.g. carbowax, polyvinylpyrrolidone (PVP) and its co-polymers such as polyvinylpyrrolidone-ethyl acrylate (PVP-EA), polyvinylpyrrolidone-vinyl acrylate, polyvinylpyrrolidone methylacrylate (PVP-MA), polyvinylpyrrolidone/vinyl acetate, polyvinyl acetal, polyvinyl butyral, polysiloxane, propylene maleic anhydride, maleic anhydride derivatives and co-polymers of the above, e.g. polyvinyl methyl ether/maleic anhydride.

Figure 1 – Transmission Light Micrographs of Shampoos BR2 and B4 after one month's storage at 37°C (field width ~160µm)

Shampoo BR2

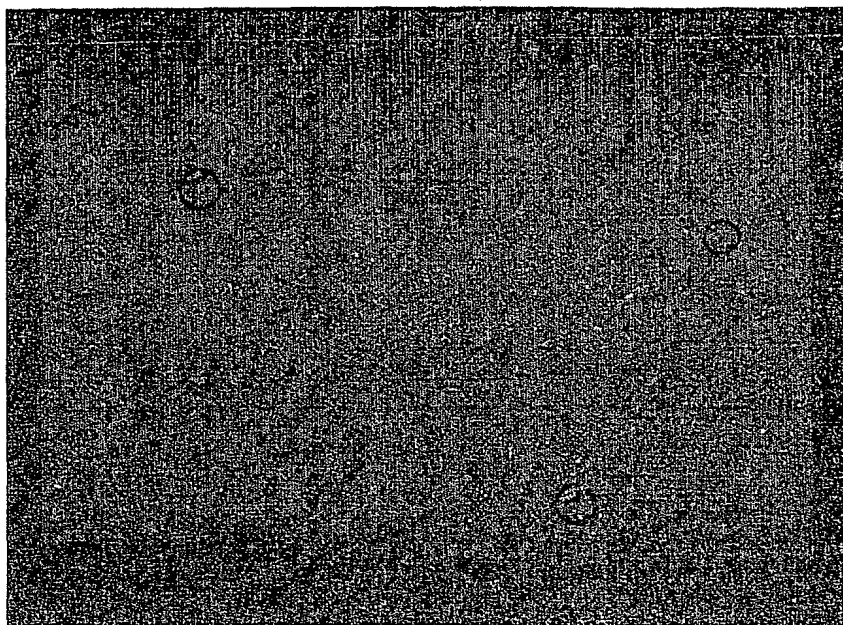

Shampoo B4

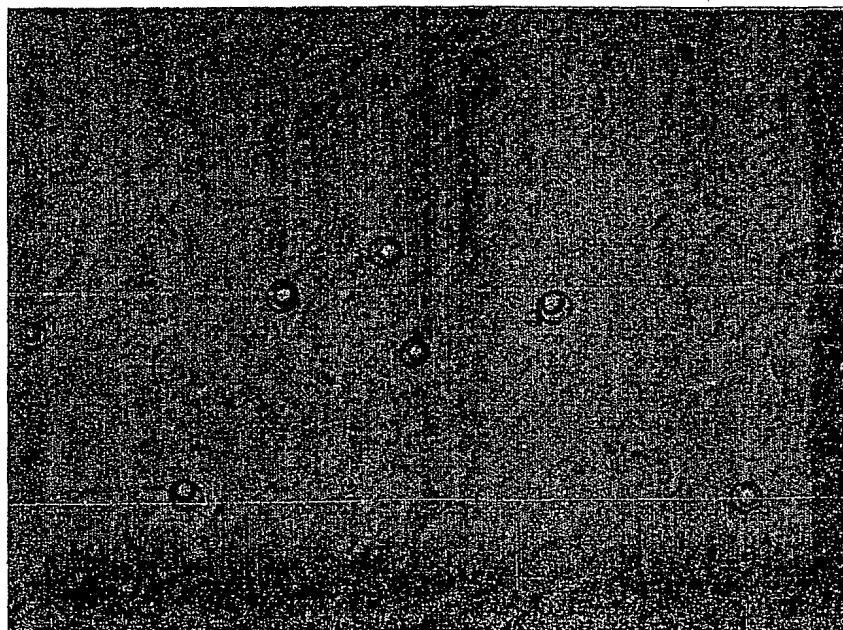

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61K7/00 B01J13/22 B01J13/06 A61K9/50

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61K B01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, CHEM ABS Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 92 20771 A (ALLIED COLLOIDS LTD) 26 November 1992 (1992-11-26)	1-5, 7, 8, 10, 13, 17, 25, 28-30, 32, 33, 38, 42, 50 1-57
Y	page 4, line 23 - line 31 page 14, line 29 - page 15, line 10 page 18, line 31 - page 19, line 16 --- -/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the International filing date but later than the priority date claimed

- *T* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the International search

7 October 2003

Date of mailing of the international search report

21/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Molina de Alba, J

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	EP 1 247 568 A (PRIMACARE S L) 9 October 2002 (2002-10-09) page 2, line 11 -page 4, line 9 page 7, line 49 -page 8, line 21 page 12, line 14 - line 25 ---	1-5, 8, 13, 17, 18, 21, 28-30, 33, 38, 42, 43, 46
X	US 4 999 189 A (RUDNIC EDWARD M ET AL) 12 March 1991 (1991-03-12) abstract ---	1-4, 13, 17, 18, 28, 29, 38, 42
X	EP 0 453 001 A (GIULIANI SPA) 23 October 1991 (1991-10-23) abstract ---	1-4, 18, 21-23, 28, 29, 43, 46-48
X	EP 0 391 556 A (MEAD CORP) 10 October 1990 (1990-10-10) page 3, line 21 - line 27; claim 1 page 4, line 10 - line 12 ---	1-5, 7, 8, 13-17, 28-30, 32, 33, 38-42 1-57
X	US 4 394 287 A (SCARPELLI JOSEPH A) 19 July 1983 (1983-07-19) column 1, line 7 - line 15 column 2, line 38 - line 47 column 3, line 22 - line 55 ---	1-4, 8, 13, 14, 16-18, 21-23, 28, 29, 33, 38, 39, 41-43, 46-48
X	EP 0 465 238 A (SHIONOGI & CO) 8 January 1992 (1992-01-08) abstract ---	1-4, 8, 13, 17, 28, 29, 33, 38, 42
X	US 5 059 416 A (CHERUKURI SUBRAMAN R ET AL) 22 October 1991 (1991-10-22) abstract ---	1, 2, 4, 10, 13, 18, 28, 29, 35, 38
	--- -/--	

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 698 561 A (FLAMEL TECH SA) 3 June 1994 (1994-06-03)	1-4, 7, 13, 18, 21, 25, 26, 28, 29, 32, 38, 43, 46, 50, 51
Y	page 4, line 13 - line 23 ----	1-57
X	US 5 500 223 A (BEHAN JOHN M ET AL) 19 March 1996 (1996-03-19) column 2, line 43 - line 46; claims 1,5; examples 17-21 column 3, line 38 - line 41 ----	1-5, 8, 26, 28-30, 33, 43, 51
X	WO 01 51196 A (TRAU DIETER ;RENNEBERG REINHARD (CN); MAX PLANCK GESELLSCHAFT (DE)) 19 July 2001 (2001-07-19) claims 1,4,34,37 ----	1-4, 7, 8, 17, 28, 32, 33, 42
X	WO 96 03041 A (CIBA GEIGY AG ;NASTKE RUDOLF (DE); NEUENSCHWANDER ERNST (CH)) 8 February 1996 (1996-02-08) page 3 ----	1-4, 7, 13-17, 21-23, 28, 29, 32, 38-42, 46, 48
X	FR 1 534 285 A (NCR CO) 26 July 1968 (1968-07-26) column 1, paragraph 1 - paragraph 2 ----	1-4, 13, 18, 21-23, 28, 29, 38, 43, 46-48
X	EP 1 118 382 A (KUREHA CHEMICAL IND CO LTD) 25 July 2001 (2001-07-25)	1-4, 7, 13, 14, 16-18, 21-23, 25-29, 32, 38, 39, 41-43, 46-48, 50, 51
Y	page 8 -page 16 ----	1-57
P,Y	WO 02 074430 A (NESS JEREMY NICHOLAS ;QUEST INTERNAT B V (NL)) 26 September 2002 (2002-09-26) abstract -----	1-57

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9220771	A	26-11-1992	US 5324445 A 28-06-1994
		AT 143049 T 15-10-1996	
		AU 1789392 A 30-12-1992	
		CA 2102126 A1 15-11-1992	
		DE 69213934 D1 24-10-1996	
		DE 69213934 T2 30-01-1997	
		DK 585295 T3 17-03-1997	
		EP 0585295 A1 09-03-1994	
		ES 2093831 T3 01-01-1997	
		WO 9220771 A1 26-11-1992	
		GR 3021416 T3 31-01-1997	
		MX 9202246 A1 01-11-1992	
		US 5460817 A 24-10-1995	
		US 5492646 A 20-02-1996	
		ZA 9203510 A 17-05-1993	
EP 1247568	A	09-10-2002	EP 1247568 A1 09-10-2002
US 4999189	A	12-03-1991	US 5186930 A 16-02-1993
EP 0453001	A	23-10-1991	IT 1246382 B 18-11-1994
		AT 144138 T 15-11-1996	
		AU 654277 B2 03-11-1994	
		AU 7679891 A 11-11-1991	
		CA 2035155 A1 18-10-1991	
		CA 2040471 A1 18-10-1991	
		DE 69122751 D1 21-11-1996	
		DE 69122751 T2 13-02-1997	
		DK 524989 T3 18-11-1996	
		WO 9116042 A1 31-10-1991	
		EP 0453001 A1 23-10-1991	
		EP 0524989 A1 03-02-1993	
		ES 2093097 T3 16-12-1996	
		GR 3021847 T3 28-02-1997	
		IE 911271 A1 23-10-1991	
		JP 3194974 B2 06-08-2001	
		JP 4224517 A 13-08-1992	
		JP 5506217 T 16-09-1993	
		KR 196256 B1 15-06-1999	
		NZ 237823 A 25-09-1992	
		PT 97370 A ,B 31-01-1992	
		RU 2111743 C1 27-05-1998	
		SG 46584 A1 20-02-1998	
		US 5900252 A 04-05-1999	
		ZA 9102792 A 30-12-1992	
EP 0391556	A	10-10-1990	EP 0391556 A1 10-10-1990
		JP 2298340 A 10-12-1990	
		US 5283015 A 01-02-1994	
US 4394287	A	19-07-1983	AU 549870 B2 20-02-1986
		AU 8250682 A 21-04-1983	
		CA 1179902 A1 25-12-1984	
		CH 650414 A5 31-07-1985	
		DE 3210131 A1 04-11-1982	
		FR 2503579 A1 15-10-1982	
		GB 2102373 A ,B 02-02-1983	
		IT 1156458 B 04-02-1987	

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4394287	A		JP 1605824 C	31-05-1991
			JP 2030736 B	09-07-1990
			JP 57184431 A	13-11-1982
			ZA 8202403 A	23-02-1983
EP 0465238	A	08-01-1992	AT 103806 T	15-04-1994
			DE 69101594 D1	11-05-1994
			DE 69101594 T2	21-07-1994
			DK 465238 T3	02-05-1994
			EP 0465238 A1	08-01-1992
			ES 2055541 T3	16-08-1994
			JP 3179132 B2	25-06-2001
			JP 4358533 A	11-12-1992
			KR 168850 B1	15-01-1999
			US 5480655 A	02-01-1996
US 5059416	A	22-10-1991	CA 2019618 A1	26-12-1990
			GB 2233228 A , B	09-01-1991
			JP 3047041 A	28-02-1991
FR 2698561	A	03-06-1994	FR 2698561 A1	03-06-1994
US 5500223	A	19-03-1996	DE 69106827 D1	02-03-1995
			DE 69106827 T2	29-06-1995
			EP 0478326 A1	01-04-1992
			JP 4265149 A	21-09-1992
			US 5185155 A	09-02-1993
			ZA 9107753 A	24-06-1992
WO 0151196	A	19-07-2001	DE 10001172 A1	26-07-2001
			WO 0151196 A1	19-07-2001
			EP 1116516 A1	18-07-2001
			EP 1246692 A1	09-10-2002
			JP 2003519565 T	24-06-2003
			US 2002187197 A1	12-12-2002
WO 9603041	A	08-02-1996	AU 3078095 A	22-02-1996
			WO 9603041 A1	08-02-1996
			EP 0772395 A1	14-05-1997
			JP 11505466 T	21-05-1999
FR 1534285	A	26-07-1968	GB 1141186 A	29-01-1969
			US 3551346 A	29-12-1970
EP 1118382	A	25-07-2001	AT 235960 T	15-04-2003
			AU 2546901 A	24-07-2001
			CA 2328826 A1	26-03-2001
			CZ 20022751 A3	15-01-2003
			DE 60100150 D1	08-05-2003
			EP 1118382 A1	25-07-2001
			HU 0203875 A2	28-03-2003
			WO 0151195 A1	19-07-2001
			JP 2003519564 T	24-06-2003
			SK 11482002 A3	04-03-2003
			US 2001008874 A1	19-07-2001
WO 02074430	A	26-09-2002	WO 02074430 A1	26-09-2002